

Specialist Polymer Flooring Systems for:

WINERIES

- ✓ Barrel Rooms & Cellars
- ✓ Fermentation Areas
- ✓ Tasting Rooms & Kitchens
- ✓ Offices & Service Areas



Welcome to Flowcrete UK

Chances are the next time you visit your local wine estate or vineyard, you'll encounter specialist resin flooring systems throughout the facility rather than the typical tile or concrete finishes traditionally found in these environments.

You'll find these systems not only behind the scenes where the wine is fermenting or aging, but also in the tasting rooms where it is being consumed. Resin flooring systems are being used more often in these environments owing to their excellent performance attributes combined with design versatility.

Flowcrete UK offers a complete package of specialist resin and antimicrobial treated floor coating systems designed to cater for all areas within the winery.

In addition to a wide range of specialist resin floor finishes, Flowcrete UK has an extensive range of Isocrete sub-floor screeds which can be installed in conjunction with Isowarm Underfloor Heating to offer a complete 'Floorzone' solution.

Winery Floor Plan



Flowfresh HF



Flowcoat SF41



Flowfast Quartz



Flowfresh MF



Peran Comfort



Mondéco Mirrazzo



For the application suitability of each system, look out for the check mark symbol throughout the brochure.



ISO 22196



Polygiene® Antimicrobial Effectiveness

SARS-CoV	✓
Salmonella Typhi	✓
MRSA	✓
Enterococcus Faecalis	✓
E-coli	✓
Staphylococcus Aureus	✓
Listeria	✓
Streptococcus Pyogenes	✓
C.difficile	✓
Pseudomonas Aeruginosa	✓
Proteus Vulgaris	✓
Campila Bacta	✓




HACCP International Certified Hygienic Flooring

A winery's floor is subject to constant traffic, impact damage due to barrel or equipment handling and is usually found in humid, acid-rich conditions.

Resin flooring systems ensure a non-porous, smooth and seamless surface where there is nowhere for bacteria or mould spores to grow.

Flowcrete UK's HACCP International and ISO 22196 certified polyurethane flooring materials offer enhanced protection with the inclusion of Polygiene®, a silver-ion antimicrobial agent, designed to protect the surface from degradation caused by microbial growth.

How Does Polygiene® Work?

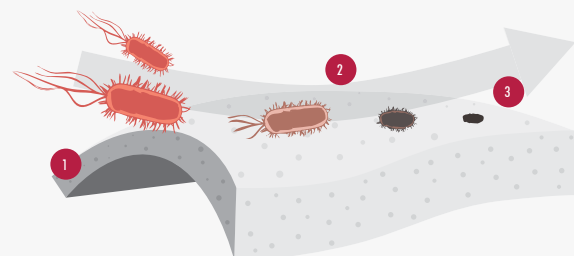

- 1 The silver ions are distributed throughout the floor.
- 2 The silver ions migrate to the surface.
- 3 They inhibit bacteria growth by penetrating the cell membrane.

Flowfresh MF (4–6mm)

Smooth, matt polyurethane screeds for use in dry areas subject to light-medium traffic. Best suited to packaging areas and processing zones subject to light-medium foot and wheeled traffic, these trowel applied systems deliver a seamless joint-free finish.

✓ BARREL ROOMS, BARREL BLENDING / COLD ROOMS

Standard Colours



Cream



Ochre



Red



Mustard



Mid Grey



Dark Green



TEMPERATURE RESISTANCE

Tolerant to intermittent spillages up to 70°C or sustained heat from -20°C to 60°C


COEFFICIENT OF THERMAL EXPANSION

ASTM C531 5.70 x 10⁻⁵ mm/mm°C

WEAR RESISTANCE

EN 13892-5 Abrasion quantity <1 cm³

ISO 22196

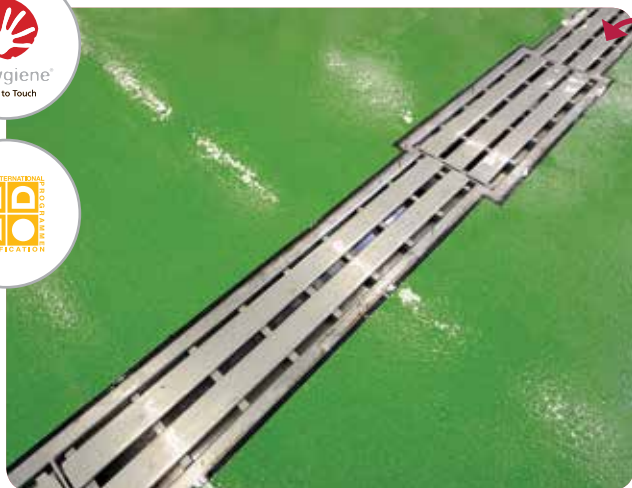

Flowfresh HF (6–9mm)

A trowel applied, heavy-duty and wear resistant antimicrobial treated polyurethane resin floor screed. Flowfresh HF provides a durable, anti-slip finish, which is resistant to thermal shock, steam cleaning and moisture vapour transmission.

✓ FERMENTATION AREAS

Standard Colours



Cream



Ochre



Red



Mustard



Mid Grey



Dark Green



Dark Grey



Gentian Blue

TEMPERATURE RESISTANCE

Tolerant to intermittent spillages up to 120°C or sustained dry heat from -40°C to 105°C (at 9 mm thickness)


COEFFICIENT OF THERMAL EXPANSION

ASTM C531 3.74 x 10⁻⁵ mm/mm°C

WEAR RESISTANCE

EN 13892-5 Abrasion quantity <1 cm³

Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.

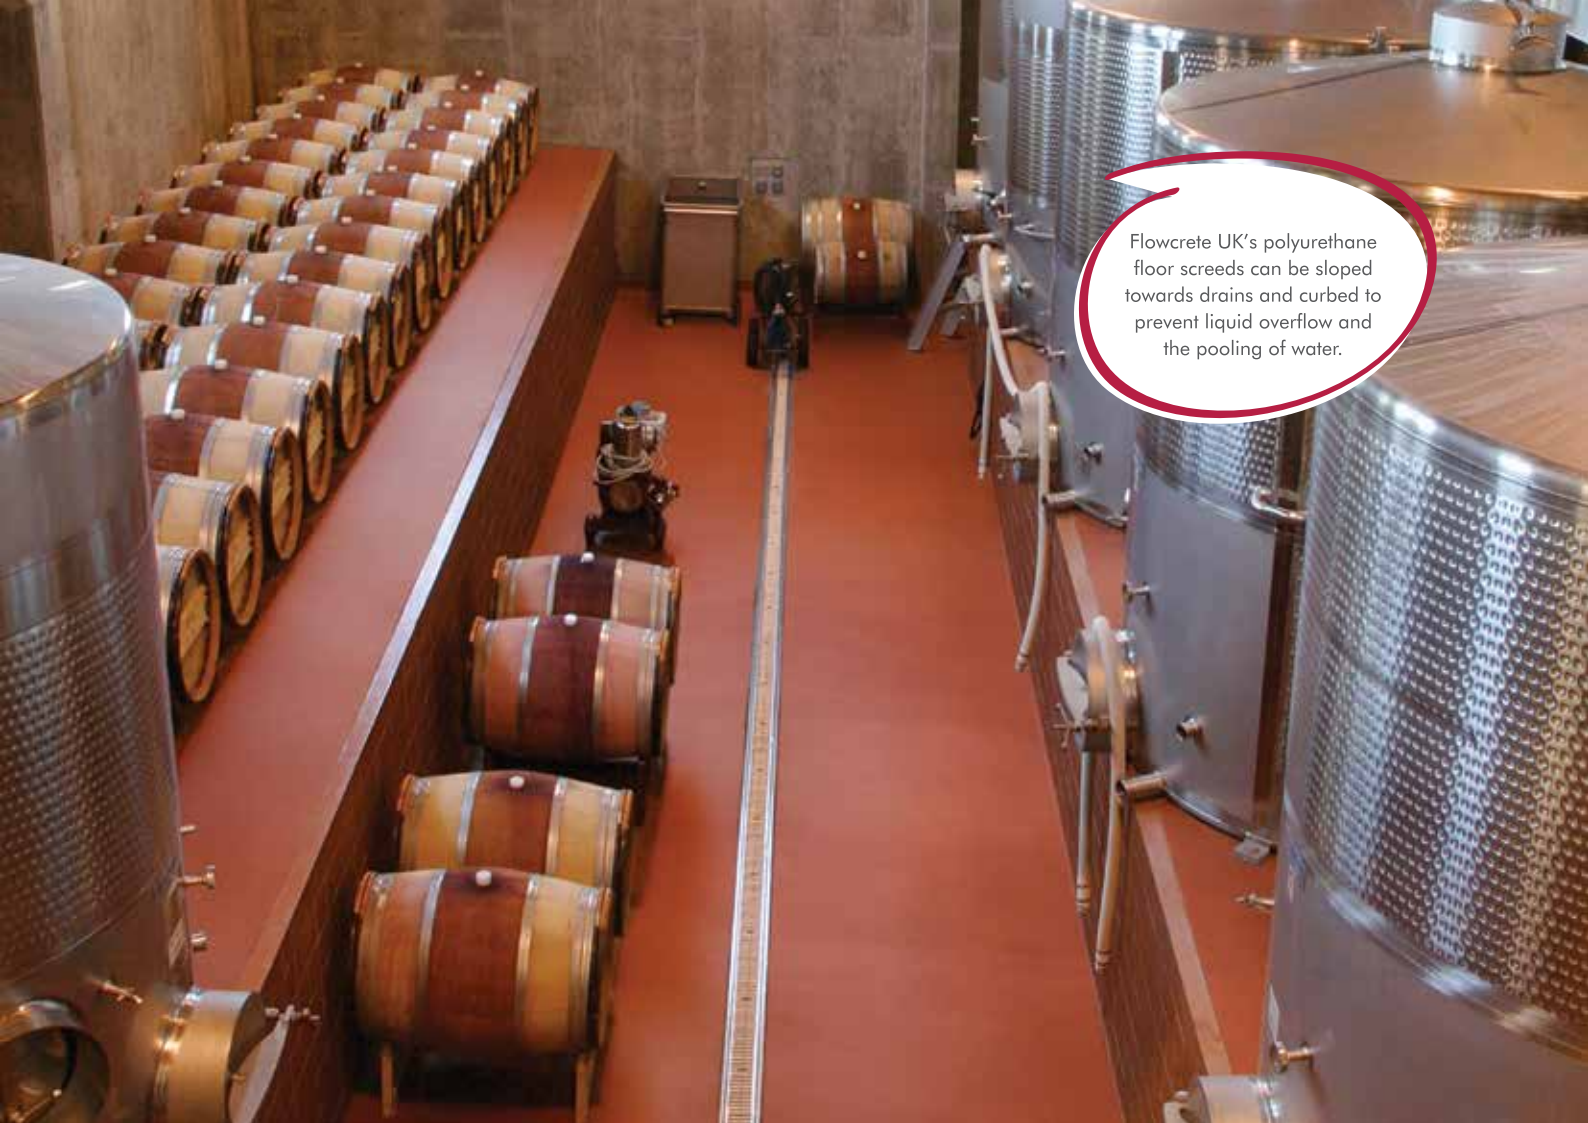

Flowcrete UK's polyurethane floor screeds can be sloped towards drains and curbed to prevent liquid overflow and the pooling of water.

Flowcoat SF41 (0.35mm)

A high performance, solvent free, epoxy resin coating that can deliver an anti-slip profile by inclusion of graded aggregate between coats. Flowcoat SF41 is also hard wearing against sustained vehicle traffic, as well as chemical and abrasion resistant.*


☒ CHEMICAL & EQUIPMENT STORAGE

Standard Colours

			
Light Grey 232	Beige 326	Goosewing Grey 222	Tile Red 637
			
Mid Grey 280	Forest Green 754	Dark Grey 281	Traffic Blue 466



SLIP RESISTANCE	
BS 7976-2 (typical values for 4-S rubber slider)	Dry >40
WEAR RESISTANCE	
EN 13892-5	Abrasion quantity <1 cm ²
IMPACT RESISTANCE	
EN ISO 6272	10 N/m

 *Flowcoat CR is available for additional chemical resistance. Please contact your local Flowcrete representative for further information. A full technical profile is available at www.flowcrete.co.uk

Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.



Ensure a decorative yet durable surface in tasting rooms, entrance areas and visitor areas with attractive terrazzo floor finishes.

Mondéco Mirrazzo (6–7mm nominal)

A seamless, hard-wearing, epoxy resin terrazzo floor finish comprising a blend of aggregates to deliver a contemporary aesthetic. Containing crushed clear, coloured and mirrored glass alongside metallic particles, this system creates a glamorous finish underfoot, ideal for hotels and restaurants.

✓ TASTING ROOMS, LOBBIES



Standard Colours



Botticino




Sapphire



Nephrite



Sodalite



Pearl Grey



Bardiglio



Haematite



Black Diamond

TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 60°C

SLIP RESISTANCE

BS 7976-2

Dry >40
Low slip potential

WEAR RESISTANCE

EN 13892-4

Max. wear depth <50µm

Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.

Flowfast Quartz (4mm)

A hard wearing, decorative and fast curing MMA flooring system that delivers a decorative matte finish. Flowfast Quartz consists of durable colour stable quartz granules encapsulated in a clear resin binder and delivers a fully trafficable surface just 60 minutes from application.

✓ KITCHENS

Standard Colours



Biscuit
102



Light Grey
701



Beige
101



Mid Grey
702



Grass Green
601



Dark Grey
703



Mid Blue
501



Black
901



TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 70°C

SLIP RESISTANCE

BS 7976-2

Dry >40
Low slip potential

WEAR RESISTANCE

EN 13892-4

Max. wear depth <50µm



Peran Comfort (2–3mm)

A matt, self-smoothing flexible polyurethane resin floor finish, Peran Comfort has excellent abrasion and chemical resistance properties. Ideal for a minimalist, modern, and contemporary environment, Peran Comfort is well suited for areas with intensive traffic such as offices.

✓ TASTING ROOMS, LOBBIES

Standard Colours




Signal White



Pebble Grey



Light Grey



Oyster White

TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 40°C

SLIP RESISTANCE


BS 7976-2

Dry >40
Low slip potential

WEAR RESISTANCE

EN 13892-4

Max. wear depth <100µm

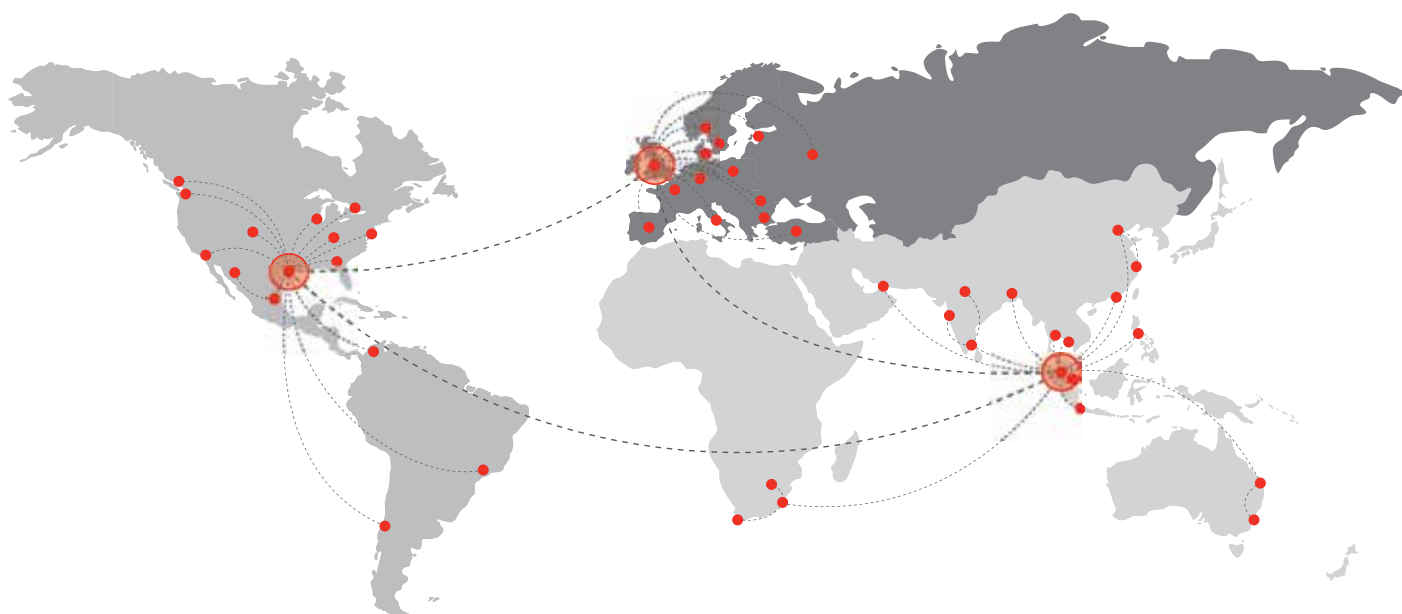

Flowcrete Group

Flowcrete Group Ltd is the world's leading specialist in seamless resin flooring, screeds and other coating technologies, with operations across five continents.

Flowcrete Europe

Baltic States	+48 883 303 880	latvia@flowcrete.com
Bulgaria	+359 898 61 58 31	bulgaria@flowcrete.com
Denmark	+46 435 40 01 10	denmark@flowcrete.com
France	+33 1 60 61 74 42	france@flowcrete.com
Germany	+49 6119 016645	germany@flowcrete.com
Italy	+39 339 4853258	italy@flowcrete.com
Norway	+47 64 86 08 30	norway@flowcrete.com
Poland	+48 22 879 89 07	poland@flowcrete.com
Romania	+48 883 303 880	romania@flowcrete.com
Russia	+7 495 645 83 18	rus@flowcrete.com
Spain	+34 937 07 0872	spain@flowcrete.com
Sweden	+46 435 40 01 10	sweden@flowcrete.com
Turkey	+90 532 416 66 52	turkey@flowcrete.com
UK	+44 1270 753 000	uk@flowcrete.com

Flowcrete International

Australia	+61 7 3205 7115	australia@flowcrete.com
Bangladesh	+880 1755563376	bangladesh@flowcrete.com
China	+86 10 8472 1912	china@flowcrete.com
Hong Kong	+852 2795 0478	hongkong@flowcrete.com
India	+91 44 4202 9831	india@flowcrete.com
Indonesia	+62 21 252 3201	indonesia@flowcrete.com
Malaysia	+60 3 6277 9575	malaysia@flowcrete.com
Philippines	+63 917 514 2696	philippines@flowcrete.com
Singapore	+65 6848 7166	singapore@flowcrete.com
South Africa	+27 31 461 3411	southafrica@flowcrete.com
Thailand	+66 2539 3424	thailand@flowcrete.com
UAE	+971 4 886 4728	uae@flowcrete.com
Vietnam	+84 8 3821 6561	vietnam@flowcrete.com

Flowcrete Americas

Brazil	+55 11 3230 1107	brazil@flowcrete.com
Canada	+1 800 218 1850	canada@flowcrete.com
Chile	+56 2 2938 1962	chile@flowcrete.com
Colombia	+57 1 381 9254	colombia@flowcrete.com
Mexico	+01 800 099 0468	mexico@flowcrete.com
USA	+1 936 539 6700	usa@flowcrete.com

*Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, Flowcrete reserve the right to change product specifications at any time without prior notice. The photographs and colours reproduced in this publication are within the constraints of the printing process and are not to be used for matching purposes. All photographs are used for approximate representation only and may not show the actual products on offer. E&OE.